


KLINGER A400: Reflex Level Gauge for process applications, suitable for shut-off fittings:

Metal-to-metal sealed valves, DVK2 or Globe Valve.

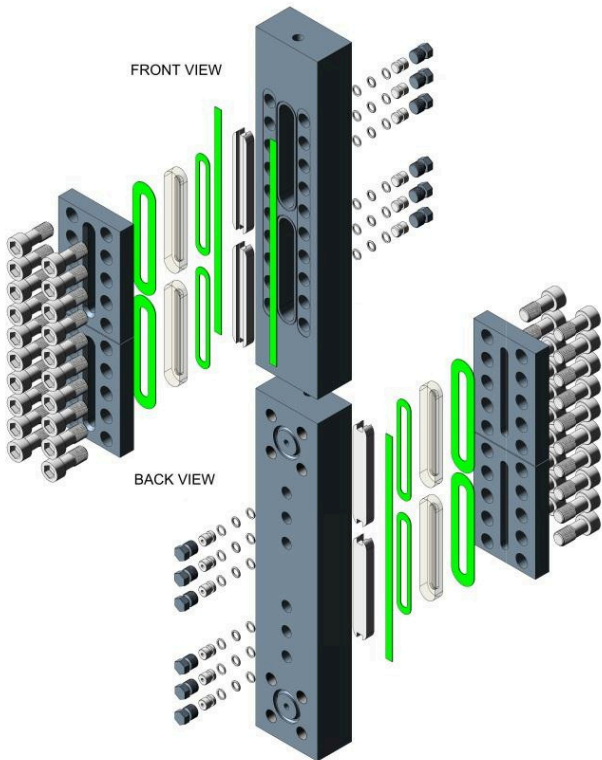

## Working Conditions

**P max**

PN 400 / ANSI 2500

**T max**

120°C


## KLINGER Material Codes

FS/H: Components in carbon steel


(\*) Other materials on request

## Accessories

- » Drain/Vent Cocks
- » Graduated Scale

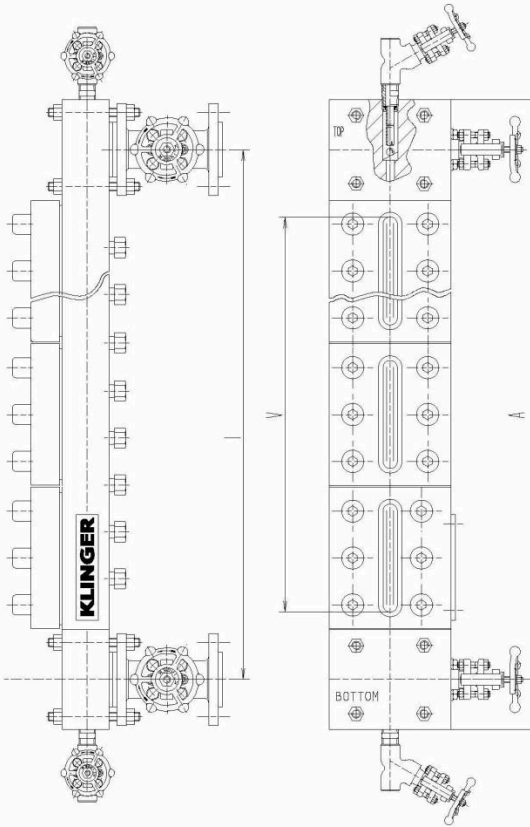

Size	Body length	Sight length	Minimum center to center distance (mm)
	A	V	I
III	450	142	310
IV	455	167	315
V	500	197	360
VI	538	227	398
VII	540	257	400
VIII	585	297	445
IX	630	317	490
2 x IV	670	382	530
2 x V	755	455	615
2 x VI	838	528	698
2 x VII	840	558	700
2 x VIII	930	641	790
2 x IX	1015	704	875
3 x VI	1140	829	1000
3 x VII	1140	859	1000
3 x VIII	1270	985	1130
3 x IX	1400	1091	1260
4 x VII	1440	1160	1300
4 x VIII	1615	1329	1475
4 x IX	1790	1478	1650
5 x VIII	1960	1673	1820
5 x IX	2175	1865	2035
6 x VIII	2305	2017	2165
6 x IX	2560	2252	2420
7 x VIII	2650	2361	2510
7 x IX	2950	2639	2810

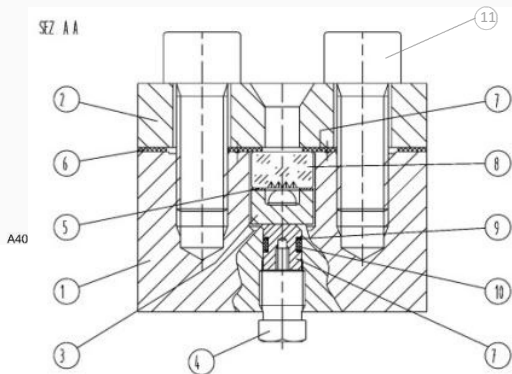

	Parts	Materials*
		FS/H
1	Level Gauge Body	S355J2
2	Cover	S355J2
3	Pressure Plate	AISI 316
4	Pressure Screw	AISI 316
5	Sealing Gasket	KLINGER SIL
6	Cushion Gasket	KLINGER SIL
7	Cushion Gasket	KLINGER SIL
8	Glass Type A	Borosilicate
9	Ring	PTFE
10	O-Ring	Viton
11	Cheese Head Screw	12.9

