

KLINGER KTA 225: Bi-Colour Level Gauge for steam applications, suitable for shut-off fittings:

DVK2 metal-to-metal sealed valves, inside screwed type.

### Working Conditions

Steam

P max	T max
225 bar	360°

### KLINGER Material Codes

FS/H: components in carbon steel

### Accessories

- » Drain/vent cocks
- » Graduated scale
- » Red/green Bi-Colour illuminator


Compliance to PED 2014/68/UE  
Compliance to ATEX 2014/34/UE upon request

Design and dimensions could be subject to modification without notice


## Bi-colour Level Gauge

**KTA 225 - DVK2**

PN 320      225 bar  
Saturated Steam

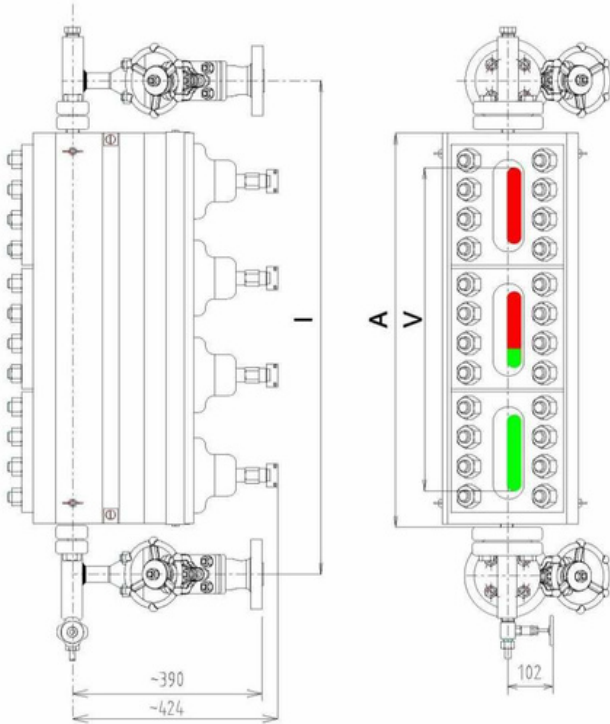

Size	Body length	Sight Length	Approx weight	Minimum centre to centre distance (mm)
	A	V	Kg	I
2 x I	290	233	24	423
3x I	426	369	36	559
4x I	562	505	48	695
5x I	698	641	60	831
6x I	834	777	72	967
7x I	970	913	84	1103
8x I	1106	1049	96	1239
9x I	1324	1267	108	1457
10 x I	1378	1321	120	1511

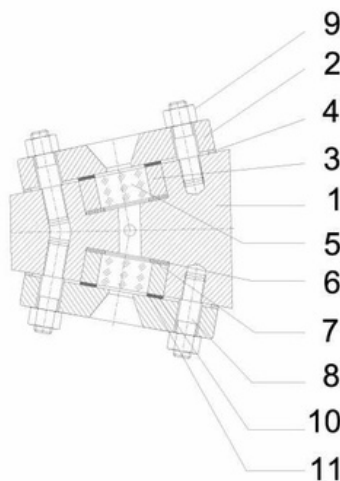

	Parts	Materials
		<b>FS/H</b>
1	Level Gauge Body	CK45N
2	Cover	CK45N
3	Glass Holder	ASTM A105
4	Spacer Strip	AISI304
5	Glass	BOROSILICATE
6	Mica Shield	MICA
7	Sealing Joint	GRAPHITE
8	Bolts	ASTM A 193-B16
9	Nuts	A 194 GR7
10	Cushion Joint	GRAPHITE
11	Glass Protector Mica	MICA

