


MR 25 - D

PN 25

KLINGER MR25: Reflex Level Gauge for steam and process applications: Suitable for shut-off fittings:

Soft sealed gauge cocks, model D (with packing).

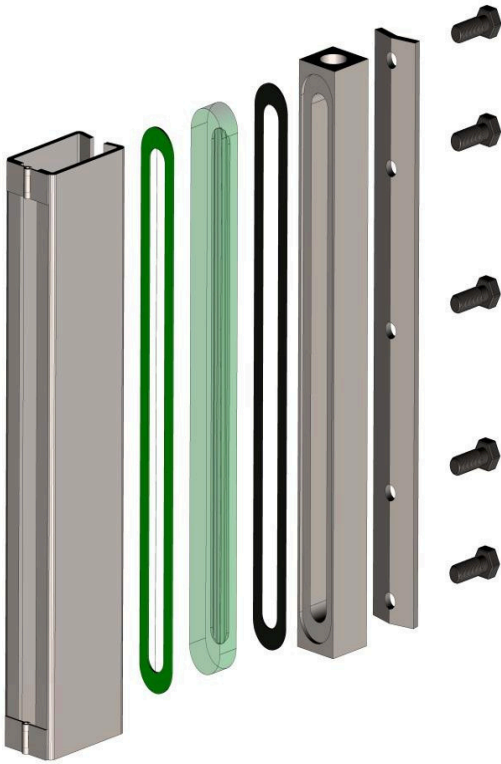

Working Conditions

P max	T max
20 bar	215°C
PN25	300°C



KLINGER Material Codes

FS/H: Components in carbon steel

(*) Other materials on request

Accessories

- » Drain/Vent cocks
- » External heating or cooling
- » Non-frosting block
- » Graduated scale

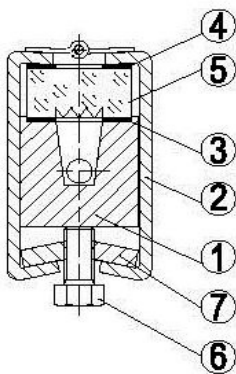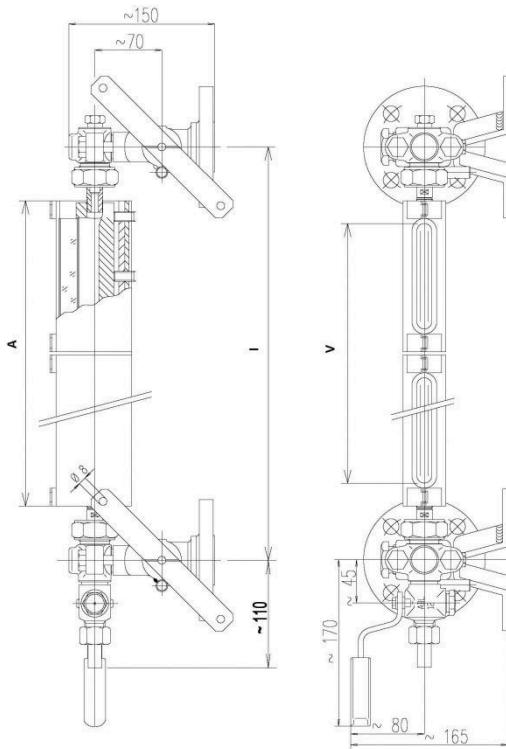

KLINGER United Kingdom
Wharfedale Road
Euroway Industrial Estate
Bradford, BD4 6SG
Tel: +44 1274 688 222
Email: sales@klingeruk.co.uk
Web: www.klinger.co.uk

Size	Body length	Sight length	Approx weight	Min center to center
	A (mm)	V (mm)	Kg	I (mm)
I	128	93	2,1	230
II	153	118	2,5	255
III	178	143	2,6	280
IV	203	168	3,3	305
V	233	198	3,6	335
VI	263	228	4,1	365
VII	293	258	4,6	395
VIII	333	298	5,3	435
IX	353	318	5,6	455
2 x IV	408	373	7	510
2 x V	468	433	7,6	570
2 x VI	528	493	8,6	630
2 x VII	588	553	9,8	690
2 x VIII	668	633	11	770
2 x IX	708	673	12	810
3 x VI	793	758	13,1	895
3 x VII	833	848	14,9	985
3 x VIII	1003	968	16,7	1105
3 x IX	1063	1028	18,2	1165
4 x VII	1178	1143	20	1280
4 x VIII	1338	1303	22,4	1440
4 x IX	1418	1383	24,4	1520
5 x VII	1473	1438	25,1	1575
5 x VIII	1673	1638	28,1	1775
5 x IX	1773	1738	30,6	1875
6 x VIII	2008	1973	33,8	2110
6 x IX	2128	2093	36,8	2230
7 x VIII	2343	2308	39,5	2445
7 x IX	2483	2448	43	2585

	Parts	Materials*
		FS/H
1	Level Gauge Body	ASTM A105
2	Cover	Fe 430
3	Sealing Gasket	GRAPHITE PSM
4	Cushion Joint	KLINGER MARINE
5	Glass "A"	BOROSILICATE
6	Bolts	8.8
7	Plate	Fe 430