



# KLINGER TOPLINE K4313

Aramid & Gore™ GFO® Yarn Hybrid Packing



TopLine hybrid packing that combines the properties of Aramid and PTFE resulting in an excellent dynamic packing for rotary and reciprocating duties.

K4313 is manufactured from a combination of aramid and graphite encapsulated PTFE yarns using the Klingerlock braiding technique. The result is a packing with high resistance to extrusion that will operate at high peripheral speeds.

Klinger TopLine packing range has been selected to provide users with gland sealing products that meet today's demanding services, offering effective and trouble-free sealing during application. To achieve this goal we have selected the best materials and the best production methods.


## GENERAL PROPERTIES

- » Suitable for water, oil, solvents, and weak acids and alkalis.
- » The PTFE/Graphite element, which is K4313's running surface, is soft and forgiving. Shaft wear is therefore kept to a minimum. It is a self-lubricating packing and has the ability to operate at temperatures up to +260°C
- » The strong aramid corner posts resist extrusion from the stuffing box while ensuring that unwanted particles are excluded. This reduces the detrimental effects of abrasive and viscous media.

## AVAILABILITY

SIZE (MM)	LENGTH (M)	SIZE (MM)	LENGTH (M)
3.2 x 3.2	8	12.5 x 12.5	8
5.0 x 5.0	8	14.0 x 14.0	8
6.5 x 6.5	8	16.0 x 16.0	8
8.0 x 8.0	8	19.0 x 19.0	8
9.5 x 9.5	8	22.0 x 22.0	8
11.0 x 11.0	8	25.0 x 25.0	8

## APPLICATION GUIDELINES

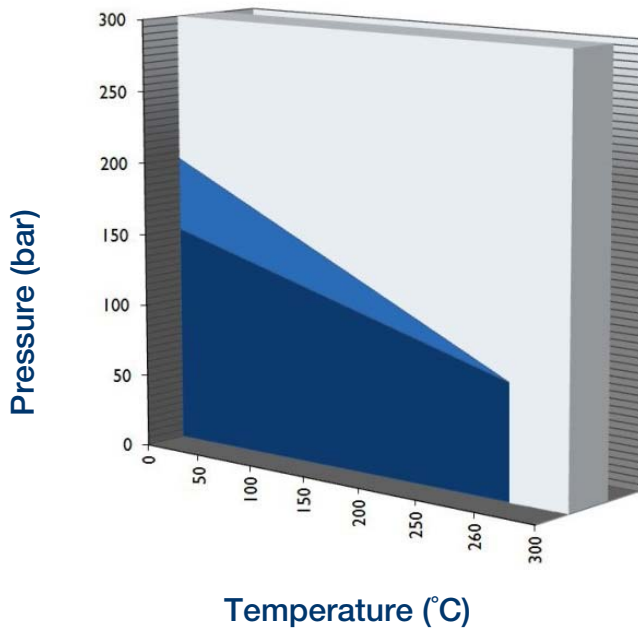

- Caution: May be suitable but essential that you refer to Klinger for advice
- Usually Satisfactory, but suggest you refer to Klinger for advice
- Usually Satisfactory to Use Without Reference

NOTE: Chemical compatibility must be considered in all cases.

## TYPICAL SPECIFICATIONS

PROPERTIES	VALUES
Min. Temperature	-100°C
Max. Steam Temperature	280°C
Max. Temperature	280°C
Max. Static Pressure	250 bar
Max. Dynamic Pressure	25 bar
Max. Reciprocating Pressure	150 bar
Max. Speed	20 m/s
pH Range	2-12

This packing should not be subjected to maximums of temperature, pressure and speed simultaneously.

### HEAD OFFICE

KLINGER Ltd  
Wharfedale Road  
Euroway Trading Estate  
Bradford BD4 6SG

Tel: 01274 688 222  
Fax: 01274 688 549  
www.klinger.co.uk  
enquiries@klingeruk.co.uk



FM 602916 FM 10571 OHS 570166 EMS 570165

### KLINGER RUNCORN

Tel: 01928 577 030  
Fax: 01928 575 233

### KLINGER SOUTHAMPTON

Tel: 02380 611 855  
Fax: 02380 610 360

### KLINGER ABERDEEN

Tel: 01224 772 962  
Fax: 01224 772 953

### KLINGER IMMINGHAM

Tel: 01469 575 289  
Fax: 08449 676 779

### KLINGER MIDDLESBROUGH

Tel: 01642 220 289  
Fax: 01642 220 290

### KLINGER GRANGEMOUTH

Tel: 01324 472 231  
Fax: 01324 482 111