




# KLINGER TOPLINE K4333

Polyimide-Fibre Yarn With  
PTFE Lubricant

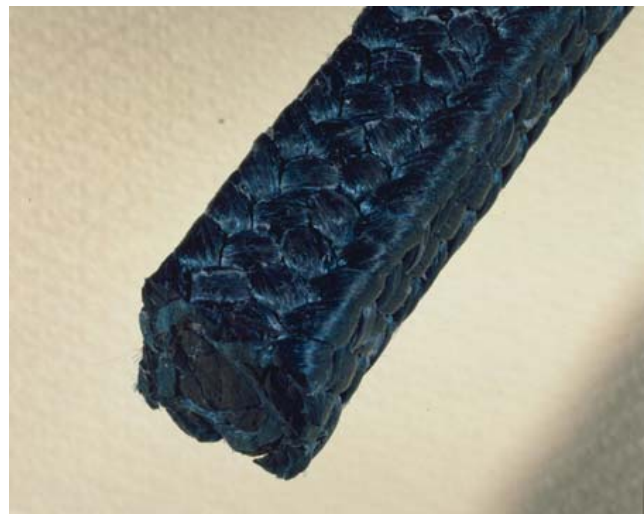

A universal packing, using lubricated polyimide filaments to produce a TopLine grade able to perform reliably in a wide range of services and equipment.

The base yarn of K4333 is composed of synthetic polyimide filaments which have excellent mechanical properties in terms of overall strength and elongation. It is manufactured by the Klingerlock braiding process, during which we add an additional PTFE based lubricant. This enhances the packings performance in dynamic applications.

Klinger TopLine packing range has been selected to provide users with gland sealing products that meet today's demanding services, offering effective and trouble-free sealing during application. To achieve this goal we have selected the best materials and the best production methods.

## GENERAL PROPERTIES

- » Suitable for water, steam, oil, hydrocarbons and weak acids.
- » The polyimide base structure of K4333 ensures the packing has excellent temperature resistance. Normally low gland loads will achieve a satisfactory seal.
- » K4333 has a wide tolerance to chemical media and is particularly suited to acid applications where control of leakage is of importance and PTFE types lack the required mechanical strength to affect an efficient seal.
- » Where shaft wear is a problem, K4333 can be employed as a good alternative to aramid based packings. In practice it significantly reduces wear rates when compared to many other packing types.


## TESTS AND CERTIFICATION

- » WRAS Approval for use with potable water

## AVAILABILITY

| SIZE (MM)   | LENGTH (M) | SIZE (MM)   | LENGTH (M) |
|-------------|------------|-------------|------------|
| 3.2 x 3.2   | 8          | 12.5 x 12.5 | 8          |
| 5.0 x 5.0   | 8          | 14.0 x 14.0 | 8          |
| 6.5 x 6.5   | 8          | 16.0 x 16.0 | 8          |
| 8.0 x 8.0   | 8          | 19.0 x 19.0 | 8          |
| 9.5 x 9.5   | 8          | 22.0 x 22.0 | 8          |
| 11.0 x 11.0 | 8          | 25.0 x 25.0 | 8          |

## APPLICATION GUIDELINES

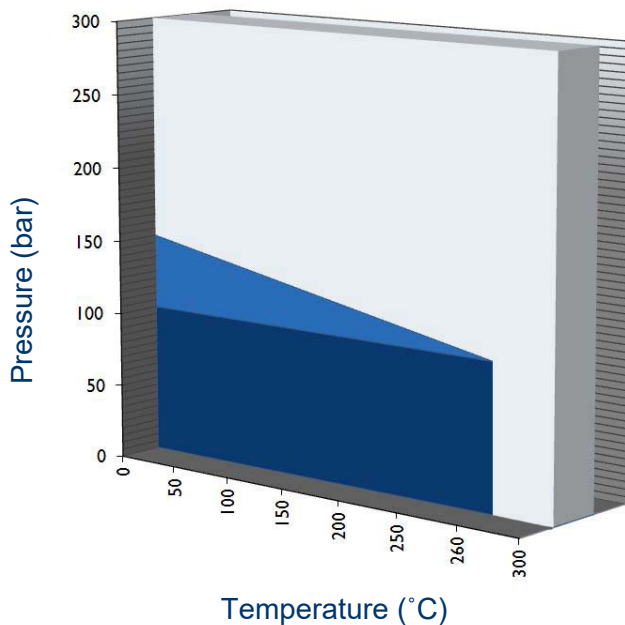

- Caution: May be suitable but essential that you refer to Klinger for advice
- Usually Satisfactory, but suggest you refer to Klinger for advice
- Usually Satisfactory to Use Without Reference

NOTE: Chemical compatibility must be considered in all cases.

## TYPICAL SPECIFICATIONS

| PROPERTIES             | VALUES  |
|------------------------|---------|
| Min. Temperature       | -80°C   |
| Max. Steam Temperature | 260°C   |
| Max. Temperature       | 260°C   |
| Max. Static Pressure   | 200 bar |
| Max. Dynamic Pressure  | 50 bar  |
| Max. Speed             | 10 m/s  |
| pH Range               | 0-13    |

This packing should not be subjected to maximums of temperature, pressure and speed simultaneously.

### HEAD OFFICE

KLINGER Ltd  
Wharfedale Road  
Euroway Trading Estate  
Bradford BD4 6SG

Tel: 01274 688 222  
Fax: 01274 688 549  
www.klinger.co.uk  
enquiries@klingeruk.co.uk



FM 602916 FM 10571 OHS 570166 EMS 570165

### KLINGER RUNCORN

Tel: 01928 577 030  
Fax: 01928 575 233

### KLINGER SOUTHAMPTON

Tel: 02380 611 855  
Fax: 02380 610 360

### KLINGER ABERDEEN

Tel: 01224 772 962  
Fax: 01224 772 953

### KLINGER IMMINGHAM

Tel: 01469 575 289  
Fax: 08449 676 779

### KLINGER MIDDLESBROUGH

Tel: 01642 220 289  
Fax: 01642 220 290

### KLINGER GRANGEMOUTH

Tel: 01324 472 231  
Fax: 01324 482 111