


K - D

PN 40
32 bar 236°C
Saturated Steam

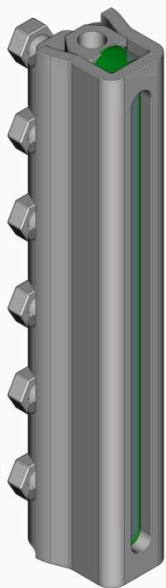

KLINGER K: Reflex Level Gauge for steam applications, suitable for shut-off fittings:

Soft sealed gauge cocks, model D (with packing).

Working Conditions

P max

32 bar

T max


236°C


KLINGER Material Codes

FS/H: Components in carbon steel


Accessories

» Drain/Vent cocks

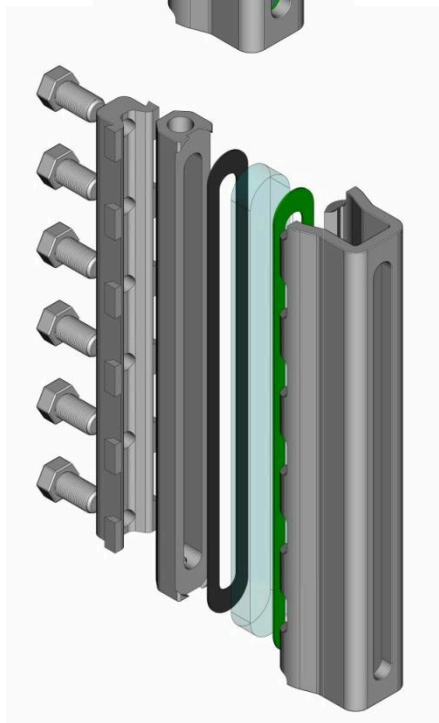

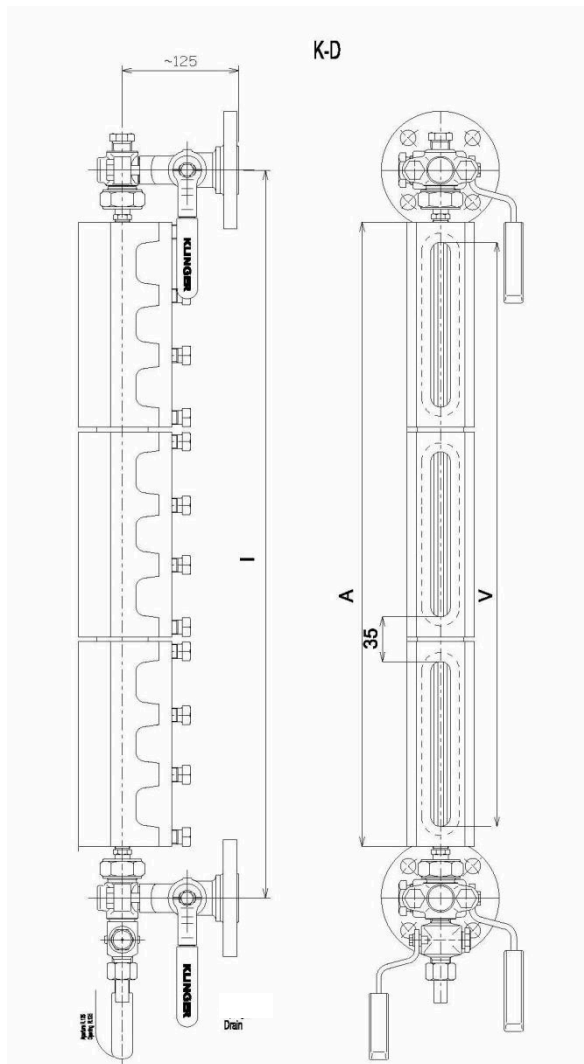

Size	Body length	Sight length	Approx weight	Minimum center to center distance (mm)
	A	V	Kg	I
III	177	143	4,30	265
IV	202	168	5,00	290
V	232	198	5,50	320
VI	262	228	6,70	350
VII	292	258	6,90	380
VIII	332	298	7,80	420
IX	352	318	8,50	440
2 x IV	406	373	10,00	495
2 x V	466	433	11,00	555
2 x VI	526	493	13,40	615
2 x VII	586	553	13,80	675
2 x VIII	666	633	15,60	755
2 x IX	706	673	17,00	795
3 x VI	790	758	20,10	880
3 x VII	880	848	20,70	970
3 x VIII	1000	968	23,40	1090
3 x IX	1060	1028	25,50	1150
4 x VII	1174	1143	27,60	1265
4 x VIII	1334	1303	31,20	1425
4 x IX	1414	1383	34,00	1505
5 x VII	1468	1438	34,50	1560
6 x VI	1582	1553	40,20	1675
5 x VIII	1668	1638	39,00	1760
5 x IX	1860	1768	42,50	1860
7 x VI	1846	1818	46,90	1940
6 x VIII	2002	1973	46,80	2095
6 x IX	2122	2093	51,00	2215
7 x VIII	2336	2308	54,60	2430
7 x IX	2476	2448	59,50	2570

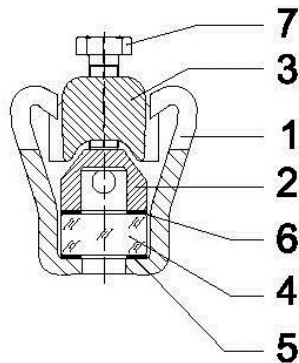

	Parts	Materials
		FS/H
1	Cover	CK 35
2	Level Gauge Body	C22.8
3	Plate	C22.8
4	Glass 'B'	BOROSILICATE
5	Cushion Joint	KLINGERSIL
6	Sealing Gasket	GRAPHITE PSM
7	Bolts	8.8

