


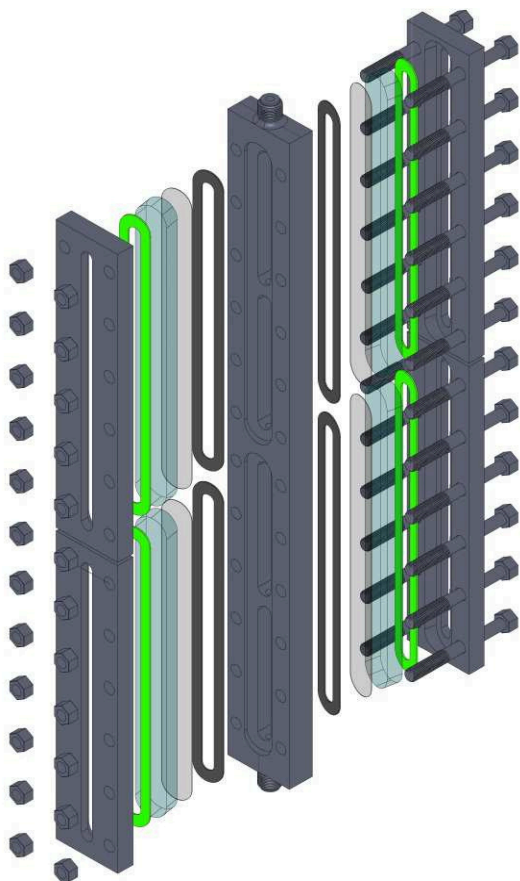

KLINGER KT25-D:
bicolour level gauges for
steam applications,
suitable for shut-off fittings.

Soft sealed gauges cocks,
model D (with packing)

Working Conditions

Steam (D)

P max

25 bar

T max



225°C

KLINGER Material Codes

FS/H: Components in
carbon steel

Accessories

- » Drain/vent cocks
- » External heating or cooling
- » Graduated scale
- » Red/green bicolour Illuminator
- » Mica or Kel-shields

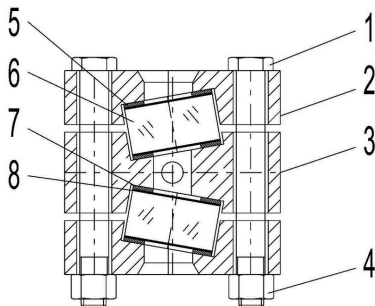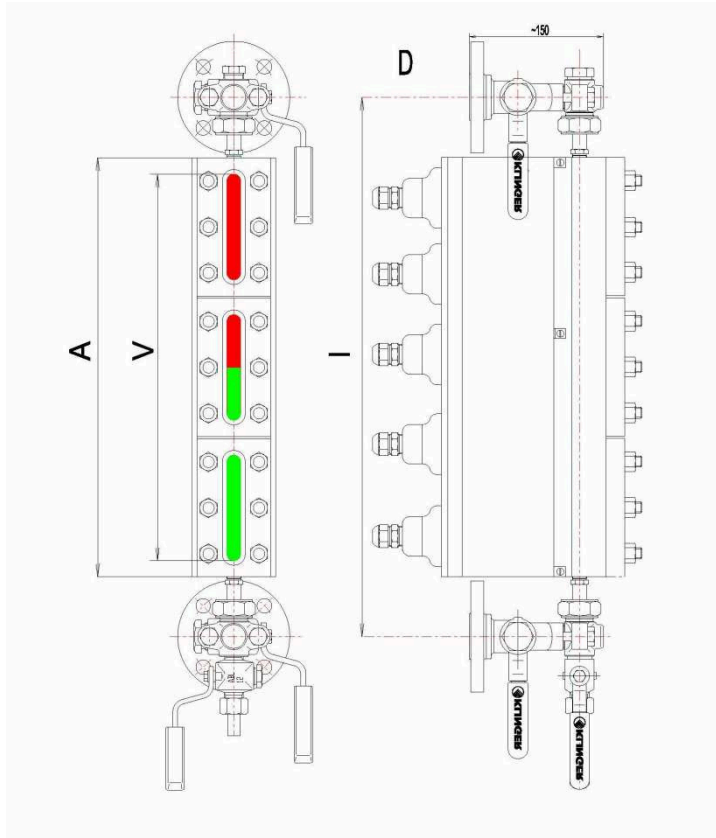

KLINGER United Kingdom
 Wharfedale Road
 Euroway Industrial Estate
 Bradford, BD4 6SG
 Tel: +44 1274 688 222
 Email: sales@klingeruk.co.uk
 Web: www.klinger.co.uk

Size	Body length	Sight length	Approx weight	Minimum center to center distance (mm)
	A	V	KG	I
IV	233	168	13,5	380
V	263	198	14,5	397
VI	293	228	15,5	430
VII	323	258	18,0	460
VIII	363	296	19,5	500
IX	383	318	20,5	520
2 x IV	438	373	27,0	585
2 x V	498	433	29,0	645
2 x VI	558	493	31,0	705
2 x VII	618	553	36,0	765
2 x VIII	698	633	39,0	845
2 x IX	738	673	41,0	885
3 x VI	823	758	46,5	1014
3 x VII	913	848	54,0	1060
3 x VIII	1033	968	58,5	1180
3 x IX	1093	1028	61,5	1240
4 x VII	1208	1143	72,0	1355
4 x VIII	1368	1303	78,0	1515
4 x IX	1448	1383	82,0	1595
5 x VII	1503	1438	90,0	1650
5 x VIII	1703	1638	97,5	1850
5 x IX	1803	1738	102,5	1950
6 x VIII	2038	1973	117,0	2185
6 x IX	2158	2093	123,0	2305
7 x VIII	2373	2308	136,5	2520
7 x IX	2513	2448	143,5	2660

	Parts	Materials
		FS/H
1	Bolts	B7
2	Cover	ASTM A 105
3	Level Gauge Body	ASTM A 105
4	Nuts	2H
5	Cushion Joint	KLINGERSIL
6	Glass B	BOROSILICATE
7	Sealing Gasket	GRAPHITE PDM
8	Mica Shield	MICA

Note : The centre to centre is calculated with 1" 300/600 RF flanges.
 For higher-rating please contact KLINGER UK