


KLINGER KT75-DVK2: bi-colour level gauge for steam applications, suitable for shut-off fittings:

Metal-to-metal sealed valves model DVK2 inside screwed type.

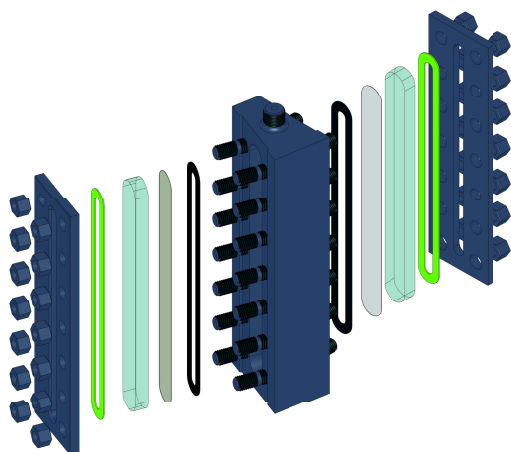

Working Conditions

Steam (DVK2)

P max
75 bar



T max
291°C

KLINGER Material Codes

FS/H: components in carbon
steel

Accessories

- » Drain/vent cocks
- » Graduated Scale
- » Red/green bi-colour illuminator
- » Mica or Kel-shields

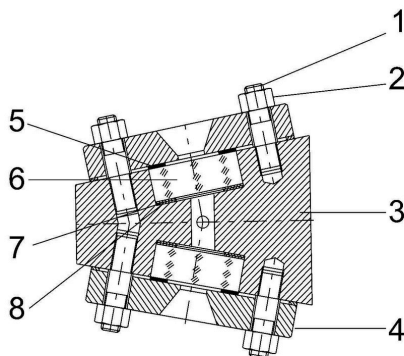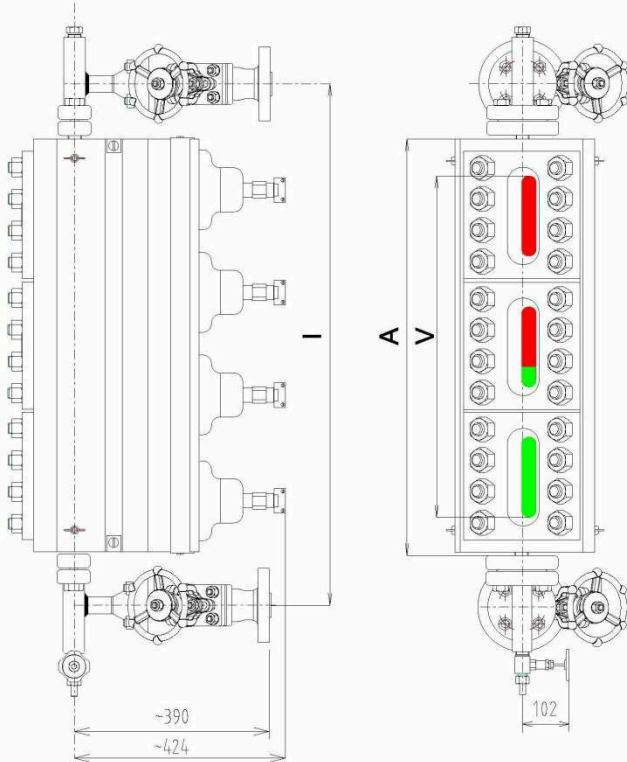

Size	Body length	Sight length	Approx weight	Minimum centre to centre distance (mm)
	A	V	KG	I
II	180	115	14,3	368
III	205	140	15,6	373
IV	230	165	16,5	398
V	260	195	18,1	428
VI	290	225	19,7	458
VII	320	255	20,9	488
VIII	360	295	23,2	528
IX	380	315	24,6	545
2 x IV	437	372	22,0	605
2 x V	497	432	25,3	665
2 x VI	557	492	28,5	735
2 x VII	617	552	31,8	785
2 x VIII	697	632	36,1	865
2 x IX	737	672	38,4	905
3 x VI	824	759	42,8	1032
3 x VII	914	849	47,7	1082
3 x VIII	1034	969	54,0	1202
3 x IX	1094	1029	57,0	1262
4 x VII	1211	1146	63,6	1379
4 x VIII	1371	1306	72,4	1539
4 x IX	1451	1386	76,8	1619
5 x VII	1508	1443	80,0	1676
5 x VIII	1708	1643	91,0	1876
5 x IX	1808	1743	97,0	1976
6 x VIII	2045	1980	112,2	2213
6 x IX	2165	2100	119,0	2333
7 x VIII	2382	2317	131,5	2550
7 x IX	2522	2457	139	2690



	Parts	Materials
		FS/H
1	Bolts	ASTM A 193 B16
2	Nuts	A 194 G7
3	Level Gauges Body	CK45N
4	Cover	ASTM A105
5	Cushion Joint	GRAPHITE PSM
6	Glass B	BOROSILICATE
7	Sealing Gasket	GRAPHITE PDM
8	Mica Shield	MICA