


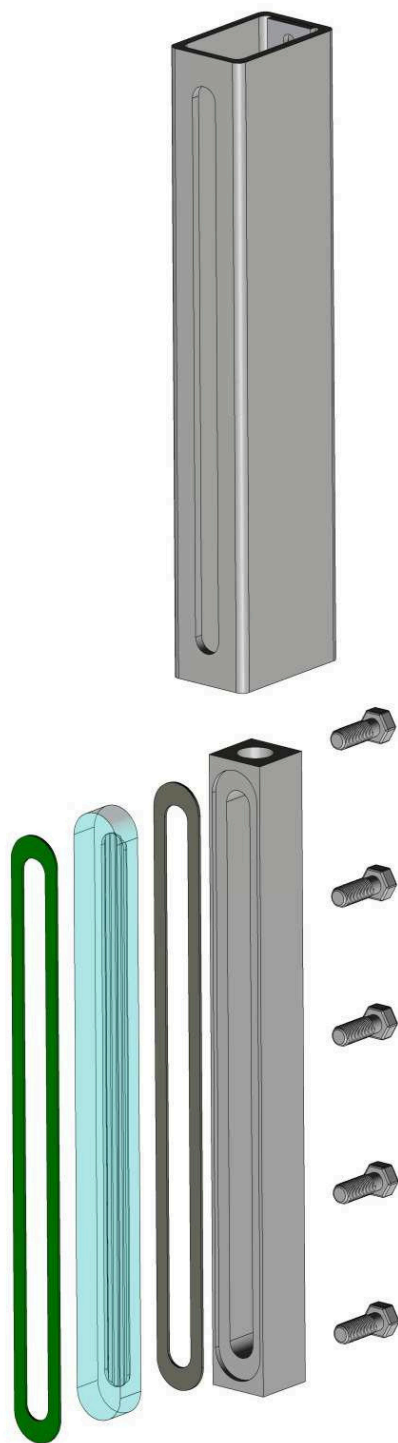

KLINGER R50: Reflex Level Gauge for steam and process applications, suitable for shut-off fittings:

Soft sealed gauge cocks, model D (with packing).

Working Conditions

P max	T max
20 bar	215°C
PN25	300°C


KLINGER Material Codes

FS/H: Components in carbon steel
 M/H: Components in contact with media in AISI 316
 M: All components in AISI 316


(*) Other materials on request

Accessories

- » Drain/Vent cocks
- » External heating or cooling
- » Non-frosting block
- » Graduated scale

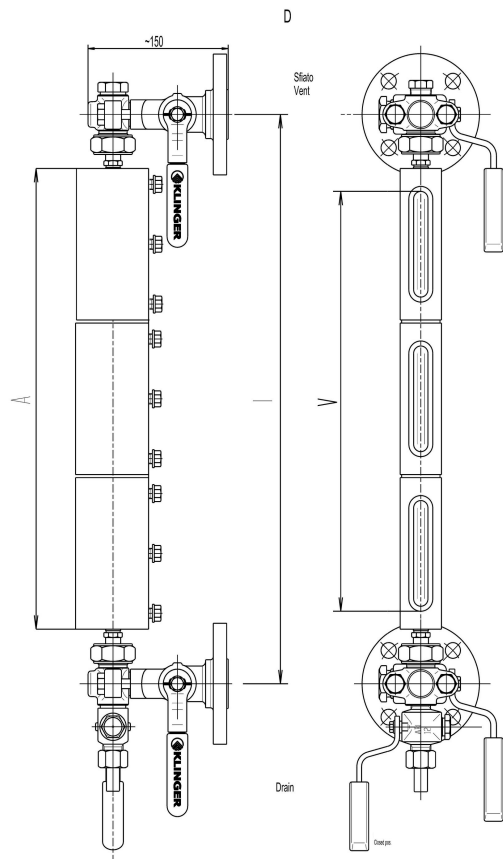

R 50.dgn

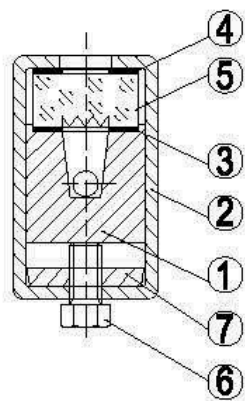

KLINGER United Kingdom
Wharfedale Road
Euroway Industrial Estate
Bradford, BD4 6SG
Tel: +44 1274 688 222
Email: sales@klingeruk.co.uk
Web: www.klinger.co.uk

*(I) Minimum center to center distance
(mm) (I)*

Size	Body length	Sight length (V)	Approx weight	D
	A	A-35	KG	A+102
I	128	93	2,5	230
II	153	118	2,9	255
III	178	143	3	280
IV	203	168	3,7	305
V	233	198	4	335
VI	263	228	4,5	365
VII	293	258	5	395
VIII	333	298	5,7	435
IX	353	318	6	455
2 x IV	408	373	7,4	510
2 x V	468	433	8	570
2 x VI	528	493	9	630
2 x VII	588	553	10,2	690
2 x VIII	668	633	11,4	770
2 x IX	708	673	12,4	810

	Parts	Materials*		
		FS/H	M/H	M
1	Level Gauge Body	ASTM A 105	AISI 316	AISI 316
2	Cover	CARBON STEEL	CARBON STEEL	ST STEEL
3	Sealing Gasket	GRAPHITE PSM	GRAPHITE PSM	GRAPHITE PSM
4	Cushion Joint	KLINGERSIL	KLINGERSIL	KLINGERSIL
5	Glass "A"	BOROSILICATE	BOROSILICATE	BOROSILICATE
6	Bolts	B 7	B 7	B 8
7	Plate	CARBON STEEL	CARBON STEEL	ST STEEL