
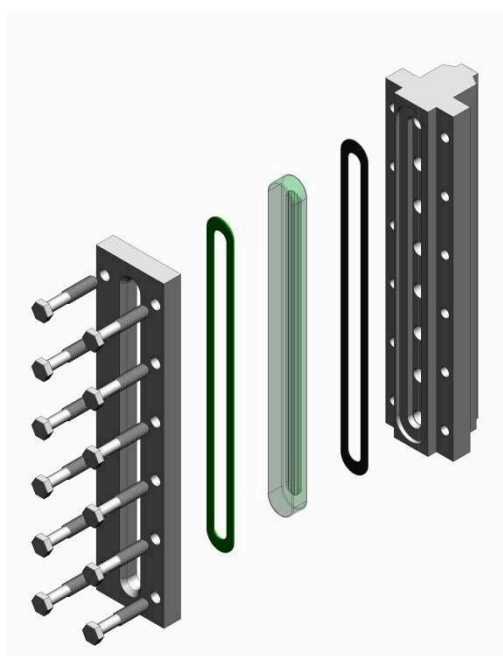


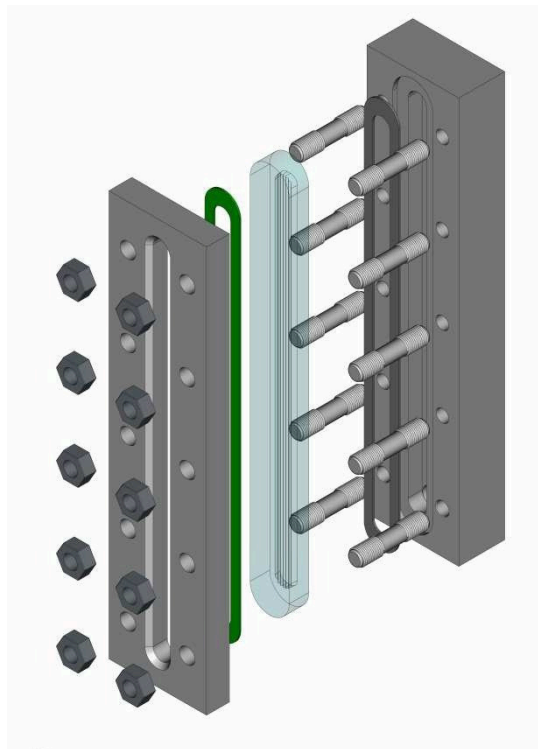

KLINGER UWR-UWT/USR-UST:
Reflex and Transparent Level Gauges
for process applications, ready to be
connected to vessel by welding.

Radius (UWR-UWT)

On request for level gauges UWR-UWT can be
carried out a radius machining on level gauge
body to suit it to vessel radius.

UWR-A/UWT-A

Available executions for pressure up to PN50/
ANSI 300

» UWR-A

» UWT-A

With body dimensions 70x30 mm and glass
type «A».

The standard uses type B crystals

Working conditions

P max

T max

PN 100/ANSI 600





400°C

KLINGER material-codes

FS/H: components in carbon steel M/H: components
in contact with media in AISI 316 M: all components in
AISI 316 (*) Other materials on request

Accessories

- » Non-frosting block
- » Graduated scale
- » Glass protection

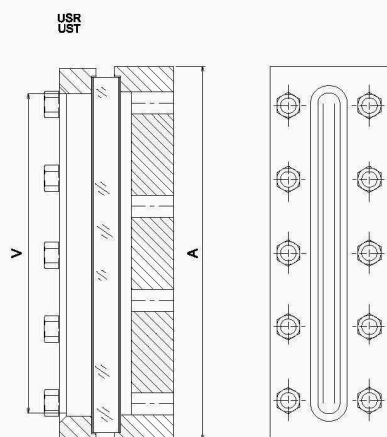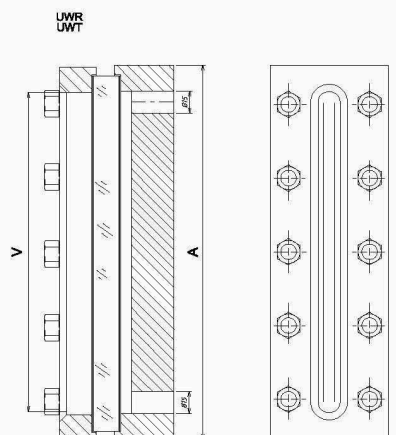

KLINGER United Kingdom
 Wharfedale Road
 Euroway Industrial Estate
 Bradford, BD4 6SG
 Tel: +44 1274 688 222
 Email: sales@klingeruk.co.uk
 Web: www.klinger.co.uk

Size	Body length	Sight length	Approx weight
	A	V	KG
I	128	93	7
II	153	118	8
III	178	143	8,5
IV	203	168	9,5
V	233	198	10,5
VI	263	228	11
VII	293	258	11,5
VIII	333	298	12,5
IX	353	318	13

	Parts	Materials*		
		FS/H	M/H	M AISI
1	Level Gauge Body	ASTM A 105	AISI 316	316 AISI
2	Cover	ASTM A 105	ASTM A 105	316
3	Sealing Gasket	GRAPHITE PSM	GRAPHITE PSM	GRAPHITE PSM
4	Cushion Joint	KLINGERSIL	KLINGERSIL	KLINGERSIL
5	Glass "B"	BOROSILICATE	BOROSILICATE	BOROSILICATE
6	Bolts	B 7	B 7	B 8 M
7	Nuts	2 H	2 H	8 M

The standard uses type B crystals