



KLINGER TOPLINE K10

Acrylic-Fibre Yarn With PTFE Lubricant



A combination of Acrylic yarn and PTFE, producing an economic yet versatile synthetic packing, well suited to general service in valves and pumps.

Klinger TopLine packing range has been selected to provide users with gland sealing products that meet today's demanding services, offering effective and trouble-free sealing during application. To achieve this goal we have selected the best materials and the best production methods.

GENERAL PROPERTIES

- » Suitable for a wide range of chemical media including steam, oils, grease and many acids and alkalis.
- » The Klingerlock construction ensures a firm yet conformable packing that requires little adjustment after the initial installation.
- » The base yarn of K10 is spun from carefully selected acrylic filaments. To this we add a controlled amount of PTFE dispersion producing a packing that is ideally suited for general valve and pump use.
- » The packing's low coefficient of friction ensures easy operation and actuation of any valve or pump, without detrimental stem or shaft wear.


TEST AND CERTIFICATION

- » WRAS Approval for use with potable water

AVAILABILITY

SIZE (MM)	LENGTH (M)	SIZE (MM)	LENGTH (M)
3.2 x 3.2	8	12.5 x 12.5	8
5.0 x 5.0	8	14.0 x 14.0	8
6.5 x 6.5	8	16.0 x 16.0	8
8.0 x 8.0	8	19.0 x 19.0	8
9.5 x 9.5	8	22.0 x 22.0	8
11.0 x 11.0	8	25.0 x 25.0	8

APPLICATION GUIDELINES

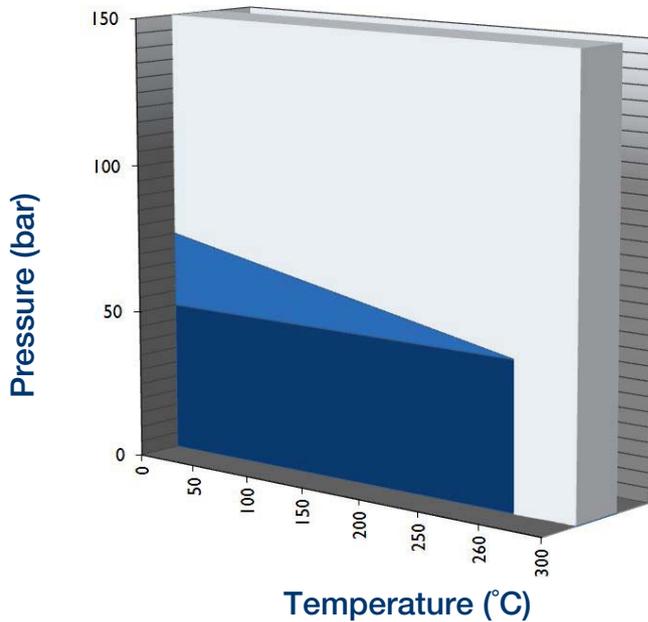

- Caution: May be suitable but essential that you refer to Klinger for advice
- Usually Satisfactory, but suggest you refer to Klinger for advice
- Usually Satisfactory to Use Without Reference

NOTE: Chemical compatibility must be considered in all cases.

TYPICAL SPECIFICATIONS

PROPERTIES	VALUES
Min. Temperature	-100°C
Max. Steam Temperature	260°C
Max. Temperature	260°C
Max. Static Pressure	100 Bar
Max. Dynamic Pressure	30 Bar
Max. Speed	10 m/s
pH Range	2-12

This packing should not be subjected to maximums of temperature, pressure and speed simultaneously.

HEAD OFFICE

KLINGER Ltd
Wharfedale Road
Euroway Trading Estate
Bradford BD4 6SG

Tel: 01274 688 222
Fax: 01274 688 549
www.klinger.co.uk
enquiries@klingeruk.co.uk



FM 602916 FM 10571 OHS 570166 EMS 570165

KLINGER RUNCORN

Tel: 01928 577 030
Fax: 01928 575 233

KLINGER SOUTHAMPTON

Tel: 02380 611 855
Fax: 02380 610 360

KLINGER ABERDEEN

Tel: 01224 772 962
Fax: 01224 772 953

KLINGER IMMINGHAM

Tel: 01469 575 289
Fax: 08449 676 779

KLINGER MIDDLESBROUGH

Tel: 01642 220 289
Fax: 01642 220 290

KLINGER GRANGEMOUTH

Tel: 01324 472 231
Fax: 01324 482 111