


KTA 180 - DVK2

PN 315 180 bar
Saturated Steam

KLINGER KTA180: bi-colour level gauge for steam applications, suitable for shut-off fittings:

DVK2 Metal-to-metal sealed valves, inside screwed type.

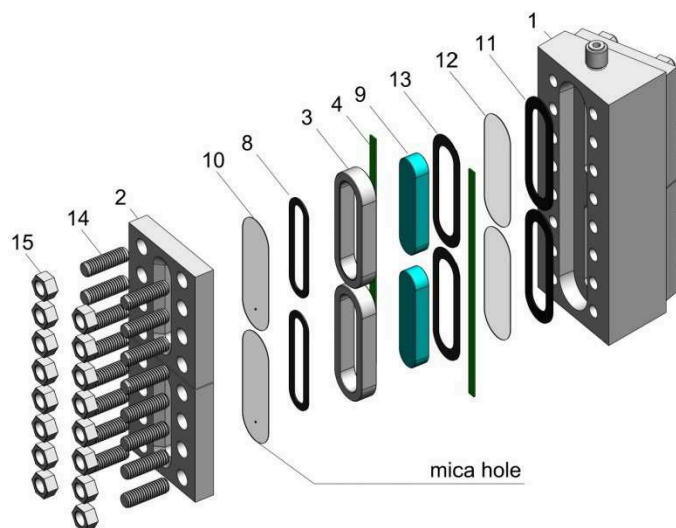

Working Conditions

Steam

P max

180 bar

T max


355°C

KLINGER Material Codes


FS/H: components in carbon steel

Accessories

- » Drain/vent cocks
- » Graduated scale
- » Red/green bi-colour Illuminator

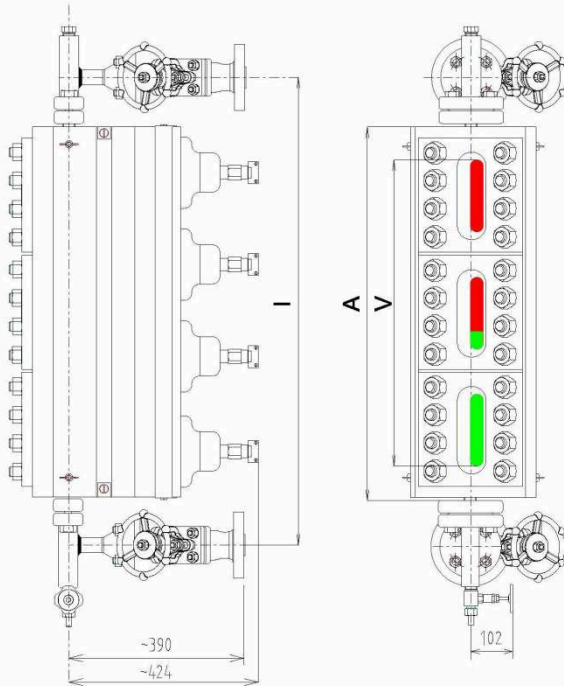

Size	Body length	Sight length	Approx weight	Minimum center to center distance(mm)
	A	V	KG	I
2 x I	290	233	24	423
3x I	426	369	36	559
4x I	562	505	48	695
5x I	698	641	60	831
6x I	834	777	72	967
7x I	970	913	84	1103
8x I	1106	1049	96	1239
9x I	1324	1267	108	1457
10 x I	1378	1321	120	1511

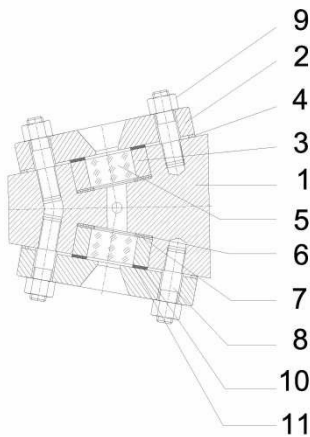

	Parts	Materials
		FS/H
1	Level Gauge Body	CK45N
2	Cover	CK45N
3	Glass Holder	ASTM A105
4	Spacer Strip	AISI304
5	Glass	BOROSILICATE
6	Mica Shield	MICA
7	Sealing Joint	GRAPHITE
8	Bolts	ASTM A 193 B16 A
9	Nuts	194 G7
10	Cushion Joint	GRAPHITE
11	Glass Protector Mica	MICA

